

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

ORDER NO. 97-197

WASTE DISCHARGE REQUIREMENTS
FOR
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WASTEWATER TREATMENT FACILITY
MADERA COUNTY

The California Regional Water Quality Control Board, Central Valley Region, (hereafter Board) finds that:

1. Yokohl Builders, Inc., on behalf of PTLA, a California corporation, (both hereafter referred to as Discharger), submitted a Report of Waste Discharge (RWD) dated 20 February 1997 and technical information dated 17 March 1997, in support of a discharge of domestic sewage from the proposed Coarsegold Village mobile home park to a new wastewater treatment and disposal facility (WWTF). Yokohl Builders, Inc., will construct and operate the Coarsegold Village mobile home park (park). PTLA will own the park and the property (Assessor's Parcel No. 054-061-030).
2. The Coarsegold Village mobile home park will be built in phases. The first phase will include approximately 63 mobile homes, a recreation center, and the first phase of the WWTF. The second phase will include an additional 59 mobile home units. The first two phases will generate a monthly average wastewater flow of 30,500 gallons per day (gpd). During the final two phases, approximately 77 mobile homes will be added (for a total of 199) and the WWTF will be enlarged as necessary. The wastewater flow generated from all four phases will be approximately 50,100 gpd. This Order only addresses the first phase of the WWTF (first two phases of development), which will be designed for an monthly average daily flow of 33,433 gpd. Further development of the mobile home park may occur under this Order as long as flow metering results indicate that actual flows remain less than 33,500 gpd. Expansion beyond the design capacity of the WWTF will require revision of this Order.
3. Wastewater from the mobile home park will be discharged to three septic tanks operated in parallel with a total volume of 33,433 gallons. The septic tanks will be followed by two recirculating sand filters with a total surface area of 6,400 ft² and a design capacity of 33,433 gpd. The sand filters will be underlain by a 30 mil HDPE or comparable liner. Treated wastewater will be discharged to a primary leachfield area. The primary leachfield area will be split into two subareas (Area 1A and Area 1B). Wastewater from the first two phases will be discharged to Area 1A, which will consist of approximately 3,625 lineal feet of leachlines in 10-foot deep leaching trenches. The leachlines were sized using one leaching trench sidewall, as required by the Madera County Environmental Health

WASTE DISCHARGE REQUIREMENTS
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-2-

Department (MCEHD). As also required by MCEHD, leachfield Area 1A will be segmented into two areas so that use can be rotated, and the Discharger will be required to maintain a 50% reserve area in addition to Areas 1A and 1B in case the primary leachfield area fails. The RWD indicates that the effluent discharged to the leachfield(s) will have a design BOD₅ of 5 to 20 mg/l.

4. The WWTF and leachfield areas are in Section 5, T8S, R21E, MDB&M, with surface water drainage to Coarse Gold Creek, as shown in Attachment A, which is attached hereto and part of this Order by reference. An ephemeral drainage to Coarse Gold Creek also traverses the site adjacent to the proposed location of the WWTF. The site lies within the Coarse Gold Creek Hydrologic Sub Area (No. 539.31), as depicted on interagency hydrologic maps prepared by the Department of Water Resources in August 1986.
5. The Board adopted a *Water Quality Control Plan for the Sacramento River Basin and the San Joaquin River Basin, Third Edition*, (hereafter Basin Plan), which contains water quality objectives and beneficial use designations for all waters of the Basin. These requirements implement the Basin Plan.
6. The beneficial uses of Coarse Gold Creek, an ephemeral tributary to the Fresno River, are municipal and domestic supply, agricultural supply, water contact recreation, non-contact water recreation, warm freshwater habitat, cold freshwater habitat, and wildlife habitat.
7. The beneficial uses of underlying ground water are municipal and domestic supply, agricultural supply, industrial service supply, and industrial process supply.
8. Two borings drilled in the proposed primary leachfield area indicate that it is underlain by 8 to 10 feet of silty sand followed by 12 to 6.5 feet, respectively, of decomposed granite. Percolation rates vary from 13.2 to 62.5 minutes per inch. Groundwater was encountered in the downslope boring at a depth of 16 feet. Two borings in the proposed reserve area indicate that it is underlain by 3 to 7 feet of silty sand followed by 4 to 5 feet, respectively, of decomposed granite. Percolation rates vary from 11.4 to 125 minutes per inch. Groundwater was encountered in the reserve area at depths of 5 and 8.5 feet. The shallow ground water is likely generated by a nearby upslope pond. The Discharger has indicated that it will lower groundwater in the reserve area if it becomes necessary to install additional leachlines. The Discharger has installed two shallow groundwater monitoring wells downslope of the primary leachfield area. Samples of water collected prior to construction of the leachfield were negative for coliform bacteria.
9. Source water for the park will be provided by two hard-rock wells several hundred feet from the leachfield areas. Further, the wells are on the side of Coarse Gold Creek opposite from and presumably away from the influence of the leachfields. Analyses of the source

WASTE DISCHARGE REQUIREMENTS
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-3-

water wells indicate that the source water is of good quality with a specific electrical conductance at 25/C of 420 to 520 $\mu\text{mhos/cm}$ and total dissolved solids concentrations of 260 to 360 mg/l. The source water wells do, however, contain iron (6.7 to 7.2 mg/l) in excess of State Secondary Maximum Contaminant Levels.

10. Solids from the septic tank will periodically be removed and hauled off by a licensed septic tank hauler.
11. The proposed WWTF and leachfield areas will be surrounded by Coarsegold Village property.
12. The new permitted discharge is consistent with the antidegradation provisions of State Water Resources Control Board Resolution 68-16. The degree of treatment provided by the WWTF and compliance with this Order will prevent significant impacts on underlying groundwater.
13. On 4 February 1992, Madera County approved a mitigated negative declaration for the WWTF, in accordance with the California Environmental Quality Act (CEQA), (Public Resources Code Section 21000, et seq.) and the State CEQA Guidelines. The Board has reviewed the mitigated negative declaration, and concurs that there will be no significant impacts on water quality.
14. The Board has notified the Discharger and interested agencies and persons of its intent to prescribe waste discharge requirements for this discharge and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
15. The Board, in a public meeting, heard and considered all comments pertaining to the discharge.

IT IS HEREBY ORDERED that PTLA and Yokohl Builders, Inc., their agents, successors, and assigns, in order to meet the provisions contained in Division 7 of the California Water Code and regulations adopted thereunder, shall comply with the following at the above described facility:

A. Discharge Prohibitions:

1. Discharge of wastes to surface waters or surface water drainage courses is prohibited.
2. Bypass or overflow of untreated or partially treated waste is prohibited.

WASTE DISCHARGE REQUIREMENTS
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-4-

3. Discharge of wastes to areas other than the designated disposal areas as described in Finding Nos. 3 and 4, is prohibited.
4. Discharge of waste classified as 'hazardous,' as defined in Section 2521(a) of Title 23, CCR, Section 2510, et seq., (hereinafter Chapter 15), or 'designated,' as defined in Section 13173 of the California Water Code, is prohibited.

B. Discharge Specifications:

1. The monthly average daily discharge shall not exceed 33,500 gallons.
2. Discharges to the leachfield shall remain underground at all times.
3. Objectionable odors originating at this facility shall not be perceivable beyond the limits of the wastewater treatment and disposal areas.
4. The WWTF and leachfields shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return frequency.
5. Public contact with the wastewater treatment and disposal area shall be precluded through such means as fences and signs, or acceptable alternatives.
6. Septic tanks shall be managed so as to prevent solids and grease carry-over into the leachfield(s). Specifically, the septic tanks shall be pumped whenever it appears that sludge or grease will begin to carry-over into the leachfield(s), when solids accumulation in any of the tanks is 75% of the usable solids storage volume of the tank, the scum layer is within three inches of the bottom of outlet devices, or the sludge level is within eight inches of the bottom of outlet devices.
7. The leaching trenches shall be designed and constructed to provide at least five feet of suitable soil between the trench bottoms and the highest anticipated groundwater or fractured bedrock.
8. Rainfall run-on shall be precluded from entering the leachfield(s).
9. Leachlines shall be designed, constructed, and maintained to meet, at minimum, the following setbacks:

WASTE DISCHARGE REQUIREMENTS
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-5-

<u>Setback Distance (feet)</u>	<u>To</u>
4h	Cut or Fill Bank ¹
50	Property Lines
50	Ephemeral Stream ²
100	Domestic Wells, Public Wells
200	Lake or Reservoir ³

-
- ¹ Distance in feet equals four times the vertical height (h) of the cut or fill bank.
Distance is measured from the top edge of the bank.
- ² As measured from the edge of the drainage course or stream.
- ³ As measured from the high water line.

10. Septic tanks shall be designed, constructed, and maintained to meet, at minimum, the following setbacks:

<u>Setback Distance (feet)</u>	<u>To</u>
4h	Cut or Fill Bank ¹
25	Property Lines
25	Ephemeral Stream ²
50	Domestic Wells
50	Lake or Reservoir ³
100	Public Wells

-
- ¹ Distance in feet equals four times the vertical height (h) of the cut or fill bank.
Distance is measured from the top edge of the bank.
- ² As measured from the edge of the drainage course or stream.
- ³ As measured from the high water line.

C. Solids and Septage Disposal Specifications:

1. Collected screenings, sludges, and other solids removed from liquid wastes shall be disposed of in a manner approved by the Executive Officer and consistent with *Consolidated Regulations for Treatment, Storage, Processing, or Disposal of Solid Waste*, as set forth in Title 27, CCR, Division 2, Subdivision 1, Section 20005, et seq.
2. Any proposed change in sludge use or disposal practice shall be reported to the Executive Officer **at least 90 days in advance** of the change.

D. Ground Water Limitations:

The discharge, in combination with other sources, shall not cause underlying ground water to contain waste constituents in concentrations statistically greater than background water quality.

E. Provisions:


1. The Discharger shall comply with Monitoring and Reporting Program No. 97-197, which is part of this Order, and any revisions thereto as ordered by the Executive Officer.
2. The Discharger shall comply with the "Standard Provisions and Reporting Requirements for Waste Discharge Requirements," dated 1 March 1991, which are attached hereto and by reference a part of this Order. This attachment and its individual paragraphs are commonly referenced as "Standard Provision(s)."
3. The Discharger shall submit by **20 November 1997** an operations and maintenance manual for the operation of WWTF wastewater treatment and disposal facilities. The manual shall describe measures that will be implemented to ensure consistent compliance with this Order, and specifically Discharge Specification Nos. B.5, B.6, and B.8, and Solids and Septage Disposal Specification No. C.1. The manual shall contain a septic tank inspection and pumping schedule to insure that the septic tank is pumped on a regular basis to prevent solids carry over into the leachlines and a rotation schedule for the leachfields.
4. By **20 November 1997** the shall submit a written report describing how it intends to comply with Discharge Specification No. B.4, B.7, B.9, and B.10.
5. When the Discharger determines that an individual leachline has failed, or is in danger of failing, it shall take appropriate action to assure the system is repaired to the satisfaction of the Board and the Madera County Environmental Health Director, or replaced, as soon as feasible.
6. The Discharger shall use the best practicable control technique currently available to comply with this Order.
7. In the event of any change in control or ownership of land or waste discharge facilities described herein, the Discharger shall notify the succeeding owner or operator of the existence of this Order by letter, a copy of which shall be immediately forwarded to this office.

WASTE DISCHARGE REQUIREMENTS
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-7-

8. To assume operation under this Order, the succeeding owner or operator must apply in writing to the Executive Officer requesting transfer of the Order. The request must contain the requesting entity's full legal name, the State of incorporation if a corporation, the name and address and telephone number of the persons responsible for contact with the Board, and a statement. The statement shall comply with the signatory paragraph of Standard Provision B.3 and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the California Water Code. Transfer shall be approved or disapproved by the Executive Officer.
9. The Discharger must comply with all conditions of this Order, including timely submittal of technical and monitoring reports as directed by the Executive Officer. Violations may result in enforcement action, including Regional Board or court orders requiring corrective action or imposing civil monetary liability, or in revision or rescission of this Order.
10. The Discharger shall submit to the Board on or before each report due date the specified document or, if an action is specified, a written report detailing evidence of compliance with the date and task. If noncompliance is being reported, the reasons for such noncompliance shall be stated, plus an estimate of the date when the Discharger will be in compliance. The Discharger shall notify the Board by letter when it returns to compliance with the time schedule.
11. A copy of this Order shall be kept at the mobile home park and available for reference by Board staff and operating personnel. Personnel responsible for the maintenance and operation of the WWTF shall be familiar with the contents of this Order.
12. The Board will review this Order periodically and will revise requirements when necessary.

I, GARY M. CARLTON, Executive Officer, do hereby certify the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on 19 September 1997.


GARY M. CARLTON, Executive Officer

WDH:9/19/97

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

MONITORING AND REPORTING PROGRAM NO. 97-197
FOR
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WASTEWATER TREATMENT FACILITY
MADERA COUNTY

Specific sample station locations shall be established with concurrence of the Board's staff. A description of the stations shall be submitted to Board and attached to this Program.

EFFLUENT MONITORING

Effluent samples shall be collected just prior to discharge to the leachfield(s). Effluent samples shall be representative of the volume and nature of the discharge. Time of collection of a grab sample shall be recorded. Effluent monitoring shall include at least the following:

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Sampling Frequency</u>
Flow	mgd	Metered	Continuous
Settleable Solids	mg/l	Grab	Weekly

SEPTIC TANK MONITORING

Each septic tank shall be monitored for the following:

<u>Constituent</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Sampling Frequency</u>
Sludge Depth in Tanks	Feet	Staff Gauge	March and September
Total Volume of Sludge (A)	Ft ³	Calculated	March and September
Total Useable Sludge Storage in Tank (B)Percent Full (A/B)	Ft ³	Calculated	March and September

The total quantity of septic tank pumpings, contract hauler, and ultimate disposal site shall be recorded and, together with a summary addressing the above mentioned constituents, shall be submitted with the Annual Report. Should a sampling event indicate that solids carryover is likely to occur prior to the next sampling event or prior next to the next septic tank pumping, then the frequency of the above monitoring shall be increased as necessary to prevent solids carryover.

LEACHFIELD MONITORING

The Discharger shall inspect the leachfield(s) at least weekly. In conducting the inspection, a log shall be kept of the condition of the leachfield area. Distribution boxes shall be inspected monthly for early detection of needed maintenance. Special attention shall be given to the presence or absence of erosion, surfacing effluent, rodent burrows and vectors. A summary of the entries made, including any corrective actions taken in the log during each month shall be submitted along with the monitoring report the following month.

GROUND WATER MONITORING

The two shallow groundwater wells downslope of the primary leachfield area shall be monitored for the following:

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Sampling² Frequency</u>
Depth	feet ¹	Measurement	Monthly
Total Coliform Organisms	MPN ³ /100 ml	Grab	Quarterly
Standard Minerals ⁴	mg/l	Grab	Annually

¹ Reported as depth to ground water, and elevation relative to MSL.

² Wells shall be properly disinfected and sampled for all constituents prior to discharge to the leachfields and as specified thereafter.

³ Most probable number.

⁴ Standard Minerals shall include pH, total dissolved solids, volatile dissolved solids, specific electrical conductance at 25/C, and all major cations and anions, and include a verification that the cation/anion analysis is complete (i.e., a cation/anion balance).

WATER SUPPLY MONITORING

A sampling station shall be established where a representative sample of the water supply can be obtained. Water supply monitoring shall include at least the following:

<u>Constituents</u>	<u>Units</u>	<u>Sampling Frequency</u>
Specific Electrical Conductance @ 25/C	µmhos/cm	Quarterly

REPORTING

Monthly monitoring reports including data for all constituents monitored at least monthly shall be submitted to the Board by the **20th day** of the following month. Results from samples collected quarterly or semi-annually shall be included within the monthly monitoring report for the month following the end of the calendar quarter or half (i.e., quarterly results for the first quarter shall be submitted with the monthly monitoring report for due in April).

Annual monitoring reports of the wastewater system shall be submitted by **20 January** of each year and shall include the dates, volumes and final destination of any septage pumped from the septic tank and/or sludge removed from the bottoms of the wastewater ponds.

In reporting the monitoring data, the Discharger shall arrange the data in tabular form so that the date, the constituents, and the concentrations are readily discernible. The data shall be summarized in a manner that clearly illustrates whether the Discharger complies with waste discharge requirements.

If the Discharger monitors any pollutant at the locations designated herein more frequently than is required by this Order, the results of such monitoring shall be included in the discharge monitoring report.

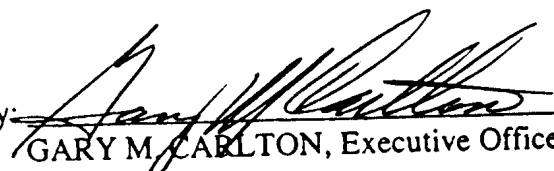
By **20 January of each year**, the Discharger shall submit a written report to the Executive Officer containing the following:

- a. The names, titles, certificate grade (if any), and general responsibilities of persons operating and maintaining the WWTF.
- b. The names and telephone numbers of persons to contact regarding the WWTF for emergency and routine situations.
- c. A certified statement of when the flow meter and other monitoring instruments and devices were last calibrated, including identification of who did the calibration (Standard Provision C.4).
- d. A statement whether the current operation and maintenance manual, and contingency plan, reflect the wastewater treatment plant as currently constructed and operated, and the dates when these documents were last reviewed for adequacy.

All reports submitted in response to this Order shall comply with the signatory requirements in Standard Provision B.3.

MONITORING AND REPORTING PROGRAM
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

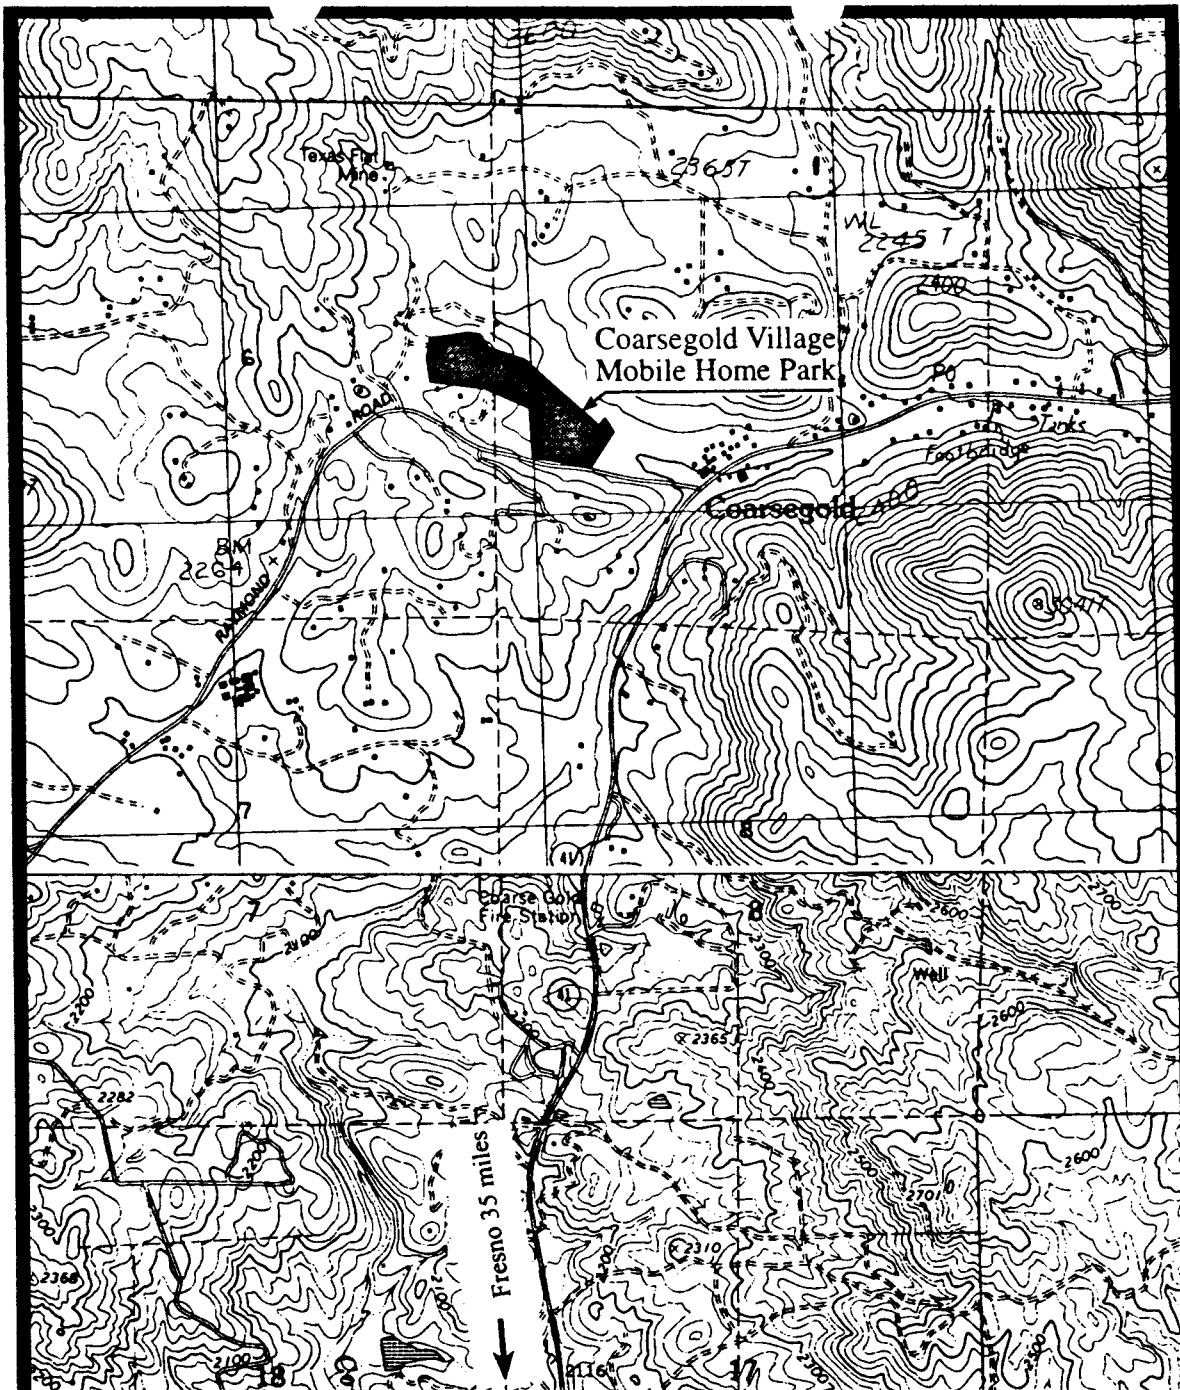
The Discharger shall implement the above monitoring program on the first day of the month following adoption of this Order.

Ordered by: 
GARY M. CARLTON, Executive Officer

19 September 1997

(Date)

WDH:9/19/97



ATTACHMENT A Vicinity Map



Scale: 1" = 2000'

PTLA
AND
YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY
Sections 5 and 6, T8S, R21E, MDB&M
O'Neals, 7.5' USGS Quad, 1981
Ahwanee, 7.5' USGS Quad, 1990

INFORMATION SHEET
PTLA AND YOKOHL BUILDERS, INC.
COARSEGOLD VILLAGE WWTF
MADERA COUNTY

-2-

Order requires all leaching trenches to be designed and constructed to provide at least five feet of suitable soil between the trench bottoms and the highest anticipated groundwater or fractured bedrock. The Discharger has indicated that it will lower groundwater in the reserve area if it becomes necessary to install additional leachlines.

Source water for the park will be provided by two hard-rock wells located on the opposite side of Coarse Gold Creek and away from the influence of the leachfield areas. Source water is of good quality with the exception of iron.

On 4 February 1992, Madera County approved a mitigated negative declaration for the WWTF, in accordance with the California Environmental Quality Act (CEQA), (Public Resources Code Section 21000, et seq.) and the State CEQA Guidelines. The Board has reviewed the mitigated negative declaration, and concurs that there will be no significant impacts on water quality.

Surface water drainage from surrounding topography is to Coarse Gold Creek, which is an ephemeral stream and water of the U.S.

WDH:9/19/97